

Parameters	Configuration	Weight	Volume
<b>Overall Dimension(m)/ Area(m<sup>2</sup>)</b>	6.1*9.5*3.1m / 57.95m <sup>2</sup> 5.9*7.9*2.95m / 40.0m <sup>2</sup>	1250kg	0.95m <sup>3</sup>
<b>Interior Area(m)/ projected area(m<sup>2</sup>)</b>	5*10*3.35m / 44m <sup>2</sup> 4.9*9.55*3.1m / 36m <sup>2</sup>	1190kg	0.65m <sup>3</sup>
<b>Colours</b>	Beige		
<b>Tent Parameters</b>	Exterior fabric: PVC semi-transparent fabric(750g) Inner tent: ultrasonic thermal insulation cotton (350g) UV protection(UV800+) Fire-retardant (GB8624) Class B1 Mold-resistant, self-cleaning, PVC lifespan of 15 years+		
<b>Frame Parameters</b>	Main Pipe①: (50*80mm)Galvanized Steel Pipe Main Pipe②: (40*60mm)Galvanized Steel Pipe (Φ48mm)Galvanized Steel Pipe、(2mm)Thickness Connecting Pipe①: U-Shaped Channel Steel, With 5mm Thickness Connecting Pipe②: U-Shaped Channel Steel, With 5mm Thickness Argon Arc Welded, Hot-Dip Galvanized Corrosion-Resistant Galvanized Steel Plate Outdoor-Specific Baking Paint Treatment (Resistant To Sunlight And Rain)		
<b>Accessory Parameters</b>	Galvanized bolts Hot-dip galvanized corrosion-resistant fittings Aluminum alloy pressure strip		




## LAYOUT

### FLOOR PLAN



5.0\*10.0\*3.35m / 44m<sup>2</sup>

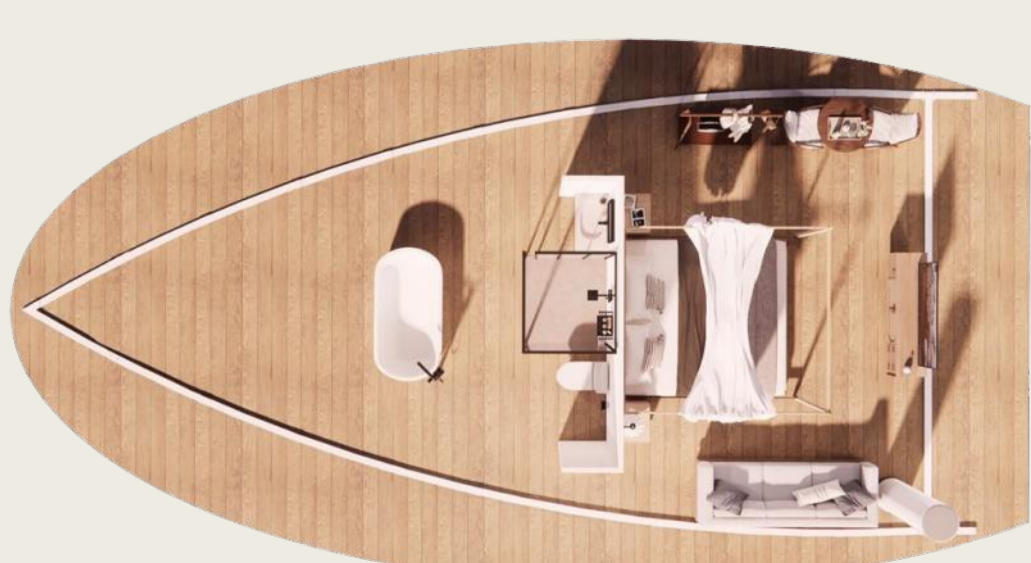

Circular Arched Window



Thermal Break Aluminum  
Glass Curtain Wall



Solar-Powered Exhaust Fan



Insulation Cotton