



Parameters	Configuration	Weight	Volume
Overall Dimension(m)/ Area(m ²) Interior Area(m)/ Area(m ²)	4.0*6.0*2.0*3.10m / 24m ² 3.4*4.0*1.8*2.80m / 13.6m ²	241kg	1.0m ³
	5.0*7.0*2.0*3.35m / 35m ² 4.2*3.6*1.8*3.10m / 15.12m ²	284kg	1.2m ³
	5.0*8.0*2.0*3.35m / 40m ² 4.2*4.8*1.8*3.10m / 20.16m ²	376kg	1.6m ³
Colours	Beige		
Outer Tent Parameters	PVC semi-transparent fabric (585g) / (600D) Oxford cloth waterproof pressure (500KPA) UV protection(UVstandard800+) Fire-retardant (GB8624) Class B1 Mold-resistant, self-cleaning, PVC lifespan of 10 years+		
Frame Parameters	Main pipe ①: Φ42mm Galvanized steel pipe、Φ2.0mm Thickness(Natural wood color) Unction pipe ①: Φ48mm Galvanized steel pipe、Φ2.0mm Thickness(Natural wood color) Main pipe ②: Φ60mm Galvanized steel pipe、Φ2.0mm Thickness(Natural wood color) Unction pipe ②: Φ70mm Galvanized steel pipe、Φ4.0mm Thickness(Natural wood color) Argon arc welded, hot-dip galvanized corrosion-resistant galvanized steel plate Outdoor-specific baking paint treatment (resistant to sunlight and rain)		
Inner Tent Parameters	TC Environmental Cotton (430g) / 600D Oxford Cloth Waterproof Pressure(≥10KPa) UV Protection (UV50+) Tear Resistance: 2112N In The Radial Direction/1056N In The Weft Direction Mold-Proof, Mosquito-Proof, Breathable		
Accessory Parameters	Stainless steel bolts、 Tear-resistant mesh、 Nickel-plated copper snap fasteners、 8mm Self-tightening anti-aging climbing rope		

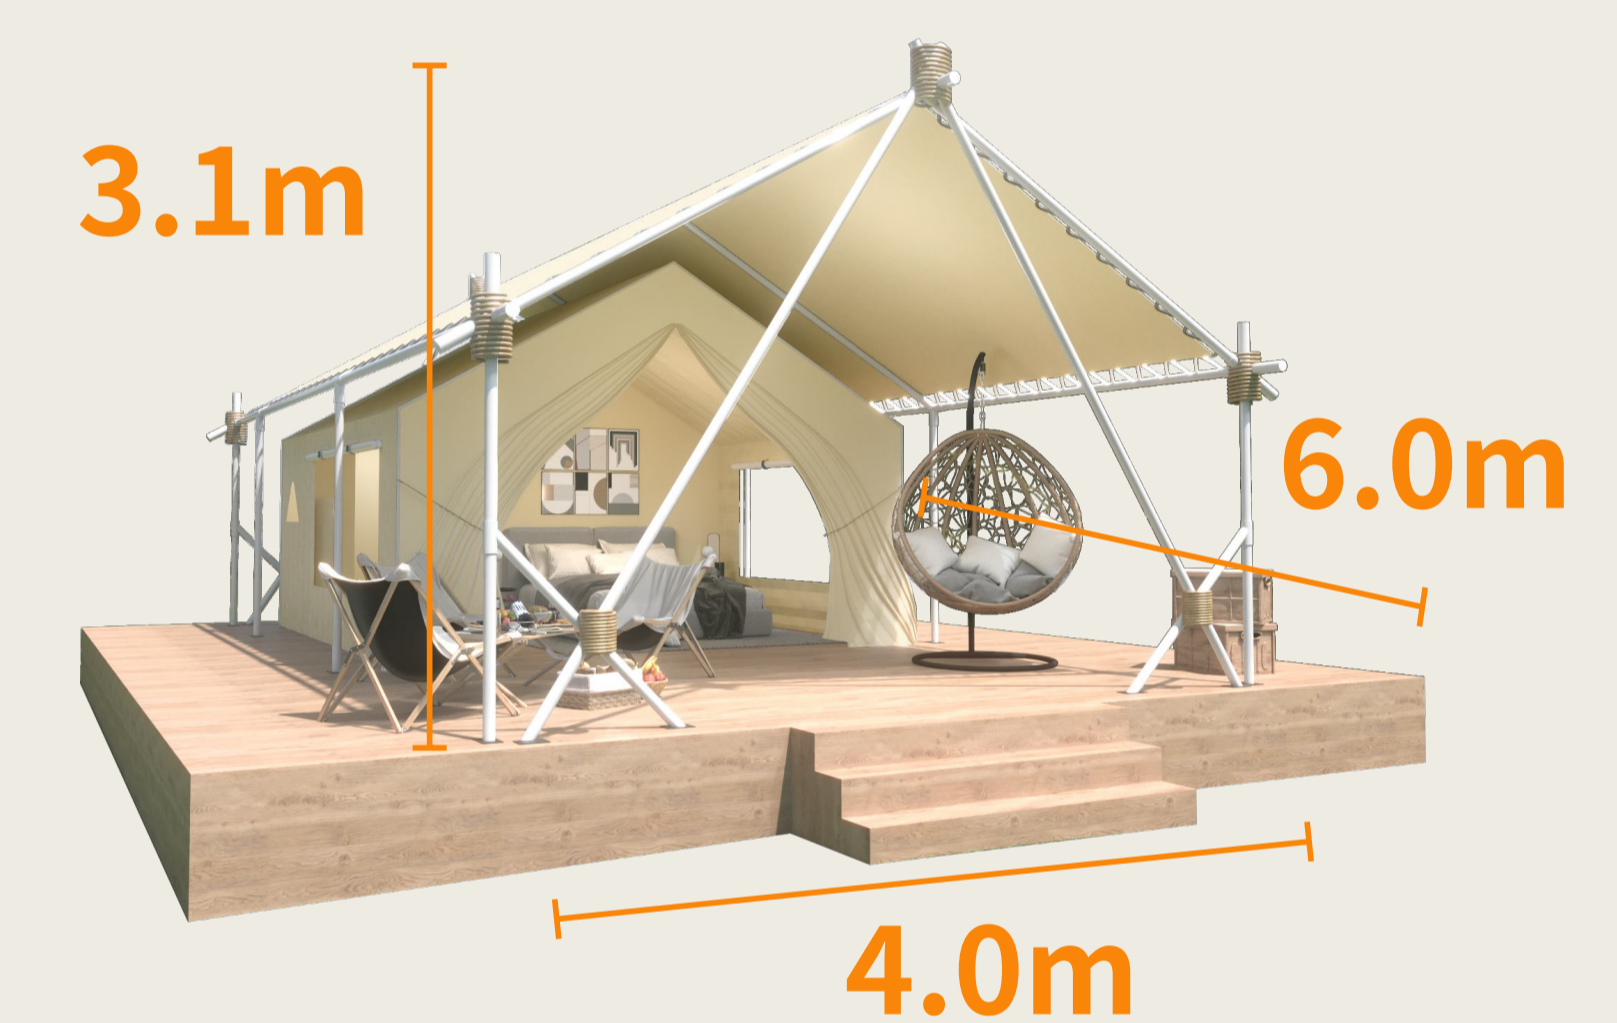


LAYOUT

FLOOR PLAN

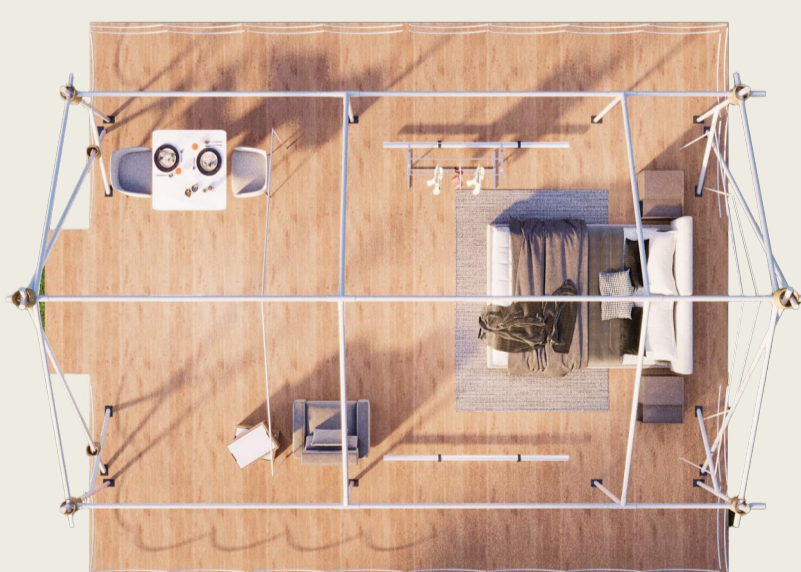


4.0*6.0*2.0*3.1m / 24m²

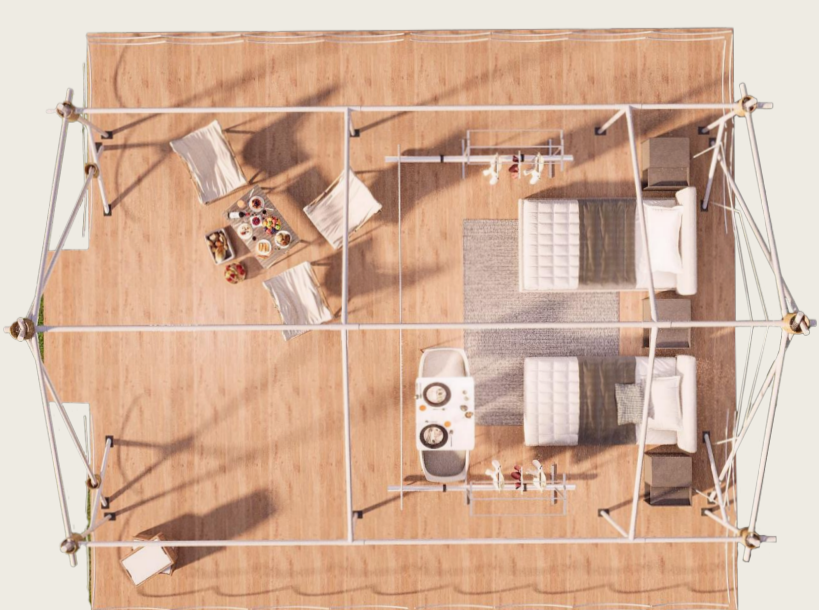

5.0*7.0*2.0*3.35m / 35m²



Reinforced Tear-Resistant Corner

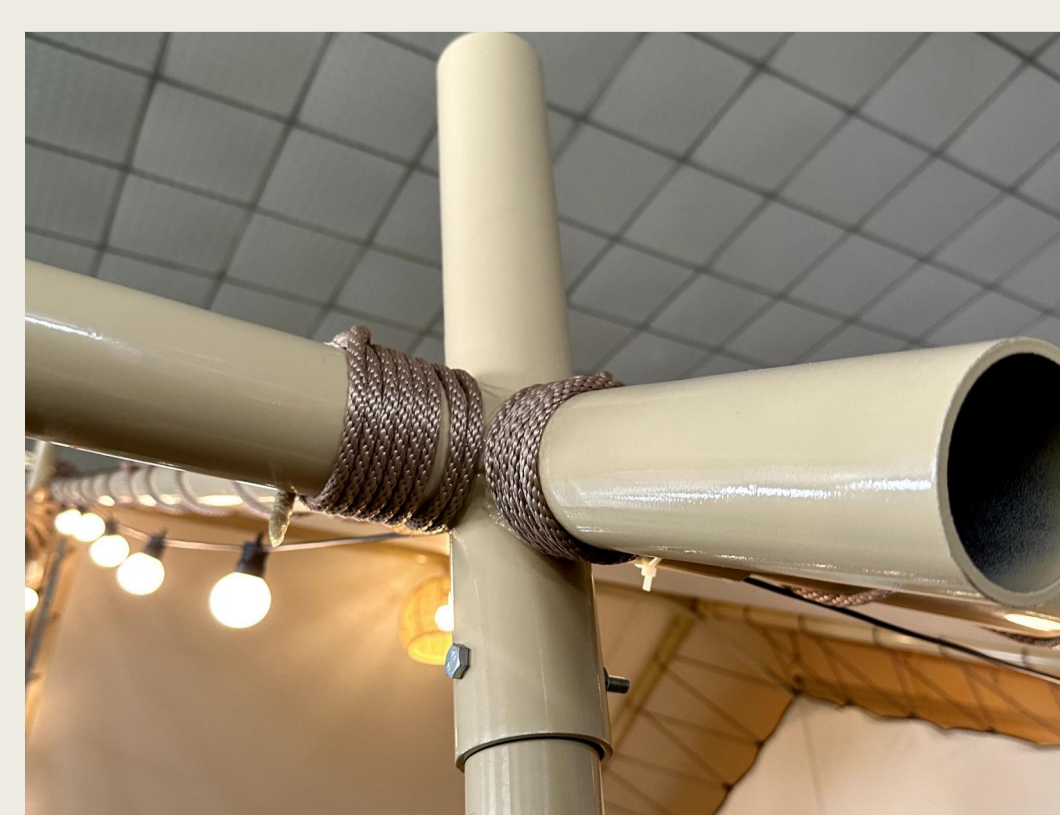

Linking Pipe



Mosquito-Proof Mesh



Moisture-Proof Ground Cloth