



Parameters	Configuration	Weight	Volume
Overall Dimension(m)/ Area(m ²) Interior Area(m)/ Area(m ²)	6.0*8.5*2.4*3.25m/51m ² 4.0*5.2*2.25*3.1m/20.8m ²	380kg	1.35m ³
	7.0*9.5*2.4*3.4m/66.5m ² 5.0*6.0*2.2*3.1m/30.0m ²	450kg	1.50m ³
	7.0*12.5*2.4*3.4m/87.5m ² 5.0*8.5*2.2*3.10m/45.0m ²	680kg	1.90m ³
Colours	Khaki, Olive Green		
Outer Tent Parameters	PVC semi-transparent fabric (750g) waterproof pressure (500KPA) UV protection(UVstandard800+) Fire-retardant (GB8624) Class B1 Mold-resistant, self-cleaning, PVC lifespan of 10 years+		
Frame Parameters	Main pipe: Hot-dip galvanized steel pipe (baked paint) Unction pipe: Φ89mm Galvanized steel pipe、Φ3.0mm Thickness(Natural wood color) Argon arc welded, hot-dip galvanized corrosion-resistant galvanized steel plate Outdoor Wood Oil Treatment (Exposure to Sunlight and Rain)		
Inner Tent Parameters	TC Environmental Cotton (430g) Waterproof Pressure(≥10KPa) UV Protection (UV50+) Tear Resistance: 2112N In The Radial Direction/1056N In The Weft Direction Mold-Proof, Mosquito-Proof, Breathable		
Accessory Parameters	Stainless steel bolts、 Tear-resistant mesh、 Nickel-plated copper snap fasteners、 8mm Self-tightening anti-aging climbing rope		

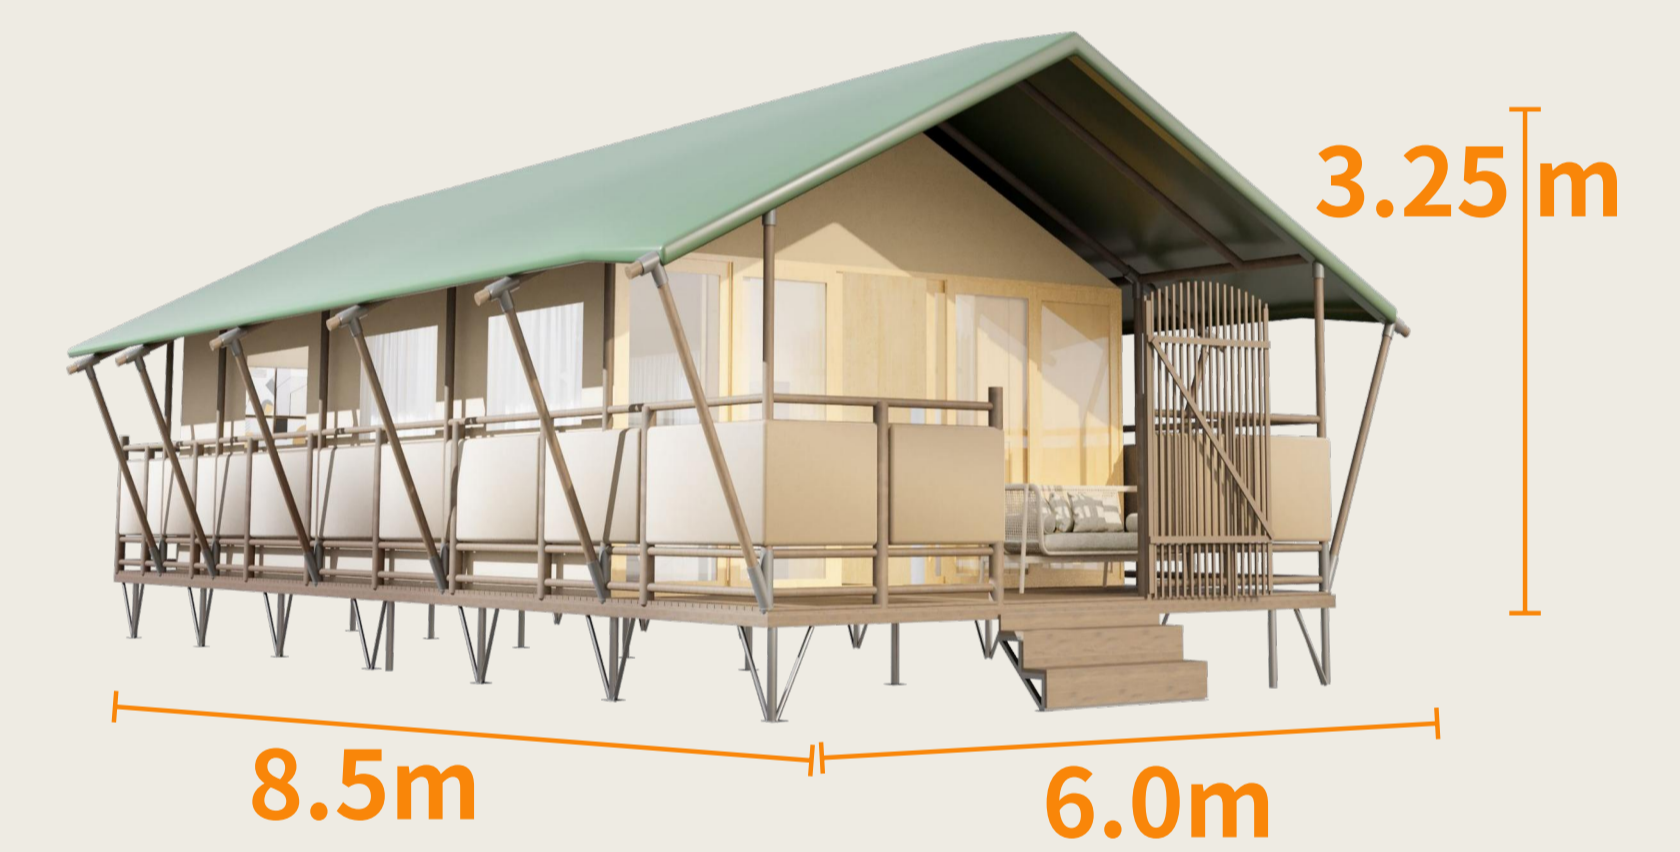

LAYOUT

FLOOR PLAN

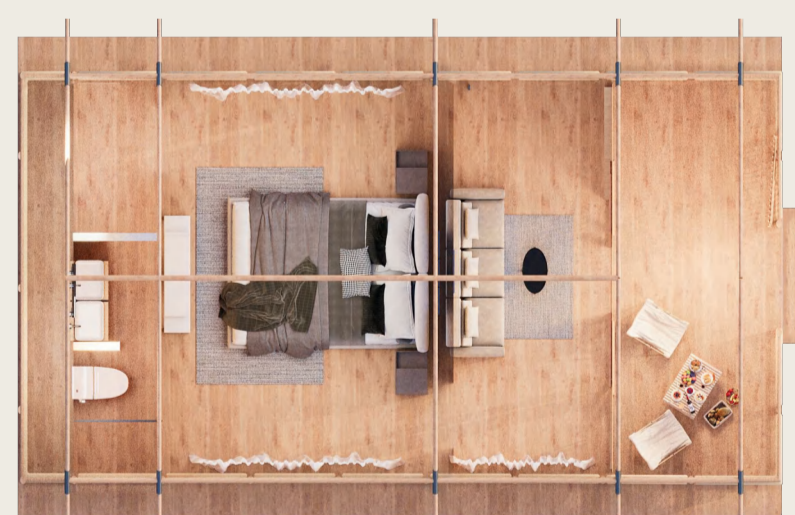

6.0*8.5*2.4*3.25m/51m²



7.0*9.5*2.4*3.45m/66.5m²



7.0*12.5*2.4*3.45m/87.5m²



Fixed Strap



Linking Pipe



Mosquito-Proof Mesh



Tightener