



Parameters	Configuration	Weight	Volume
Overall Dimension(m)/ Area(m ²) Interior Area(m)/ Area(m ²)	4.0*6.0*3.25m / 24m ² 3.5*3.5*3.05m / 12.25m ²	285kg	1.35m ³
	5.0*7.0*4.10m / 35m ² 4.5*4.5*3.80m / 20.25m ²	349kg	1.9m ³
	5.0*9.0*4.10m / 45m ² 4.5*6.5*3.80m / 29.25m ²	385kg	2.2m ³
Colours	Beige		
Outer Tent Parameters	PVC semi-transparent fabric (585g) / (600D) Oxford cloth waterproof pressure (500KPA) UV protection(UVstandard800+) Fire-retardant (GB8624) Class B1 Mold-resistant, self-cleaning, PVC lifespan of 10 years+		
Frame Parameters	Main pipe: Φ60mm Galvanized steel pipe、Φ2.0mm Thickness (Natural wood color) Unction pipe: Φ70mm Galvanized steel pipe、Φ4.0mm Thickness(Natural wood color) Argon arc welded, hot-dip galvanized corrosion-resistant galvanized steel plate Outdoor-specific baking paint treatment (resistant to sunlight and rain)		
Inner Tent Parameters	TC Environmental Cotton (430g) / 600D Oxford Cloth Waterproof Pressure(≥10KPa) UV Protection (UV50+) Tear Resistance: 2112N In The Radial Direction/1056N In The Weft Direction Mold-Proof, Mosquito-Proof, Breathable		
Accessory Parameters	Stainless steel bolts、Tear-resistant mesh、Nickel-plated copper snap fasteners、 8mm Self-tightening anti-aging climbing rope		



FLOOR PLAN

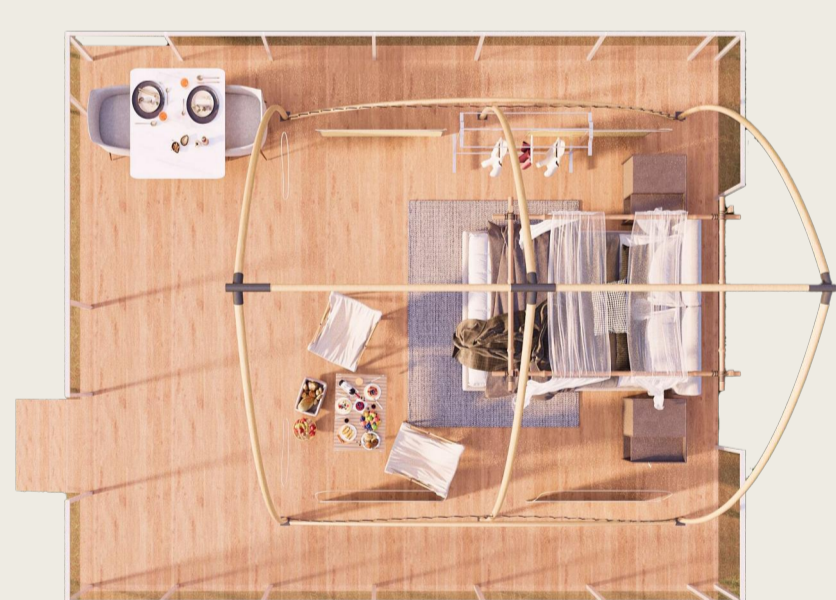

4.0*6.0*3.25m / 24m²

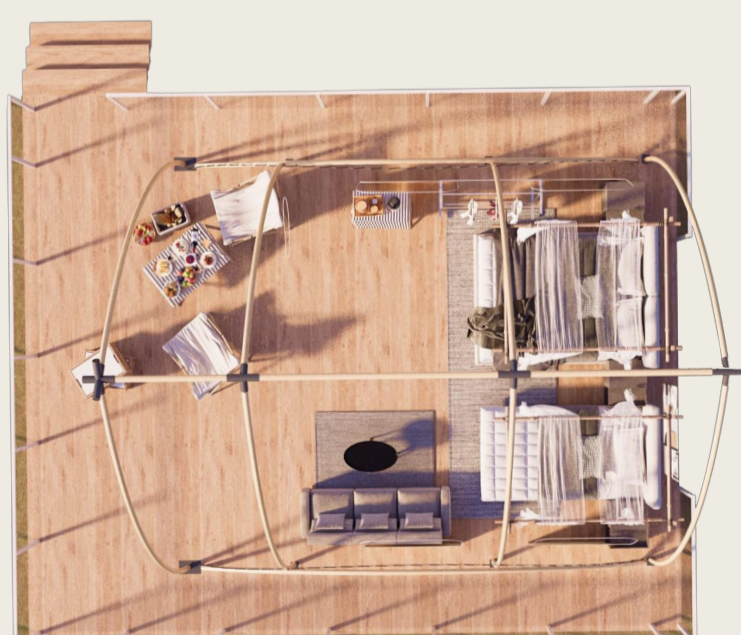


5.0*7.0*4.10m / 35m²



5.0*9.0*4.10m / 45m²


LAYOUT

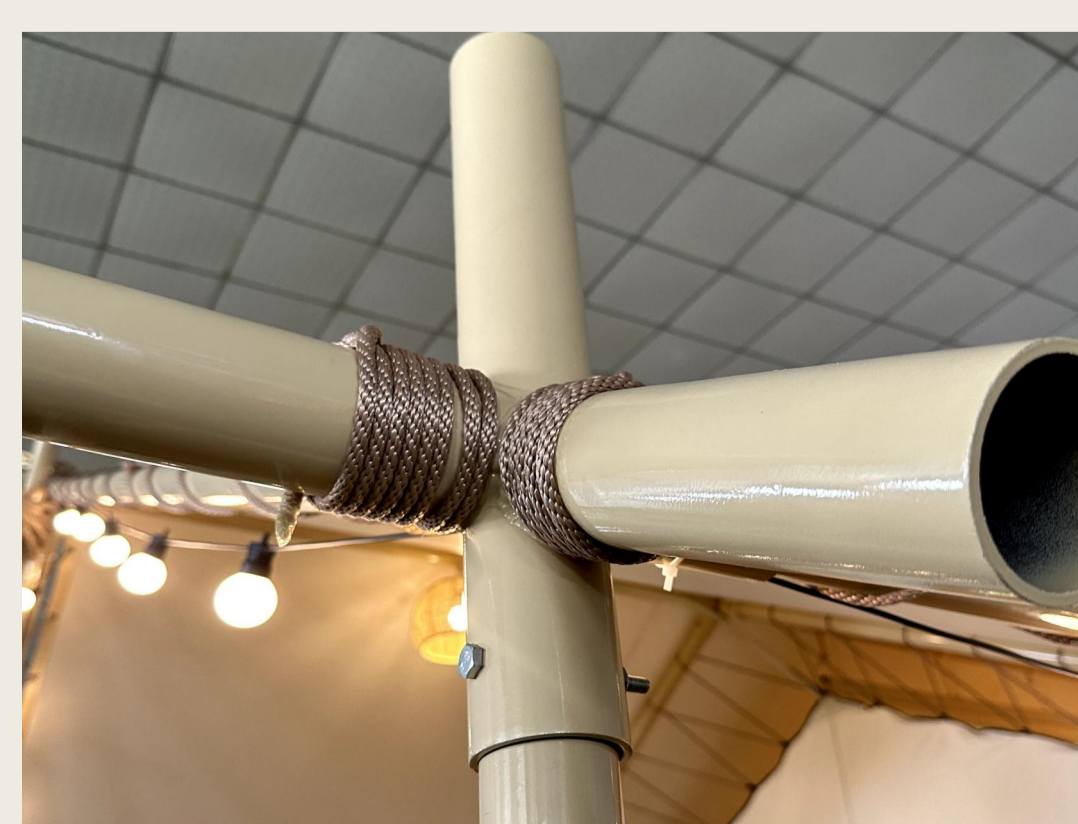


Linking Pipe



Reinforced Tear-Resistant Corner



Moisture-Proof Ground Cloth



Ground anchor fixing