


Parameters	Configuration	Weight	Volume
Overall Dimension(m)/ Area(m ²) Interior Area(m)/ Area(m ²)	6*9m+(The foyer)3.6*2.6m/60.5m ² 4*8.6m+(The foyer)2.5*2.5m/41m ²	830kg	1.657m ³
Colours	Khaki, Olive Green, Cream, Beige		
Outer Tent Parameters	PVC semi-transparent fabric (585g)、PVC semi-transparent fabric (750g) UV protection(UVstandard500+) Fire-retardant (GB8624) Class B1 Mold-resistant, self-cleaning, PVC lifespan of 10 years+		
Frame Parameters	Main pipe: Φ60mm Galvanized steel pipe、Φ2.0mm Thickness (Natural wood color) junction pipe: Φ70mm Galvanized steel pipe、Φ4.0mm Thickness (Natural wood color) Argon arc welded, hot-dip galvanized corrosion-resistant galvanized steel plate Outdoor-specific baking paint treatment (resistant to sunlight and rain)		
Inner Tent Parameters	TC Environmental Cotton (430g) Waterproof Pressure(≥10KPa) UV Protection (UV50+) Tear Resistance: 2112N In The Radial Direction/1056N In The Weft Direction Mold-Proof, Mosquito-Proof, Breathable		
Accessory Parameters	Stainless steel bolts、Tear-resistant mesh、Nickel-plated copper snap fasteners、 8mm Self-tightening anti-aging climbing rope		




LAYOUT

FLOOR PLAN

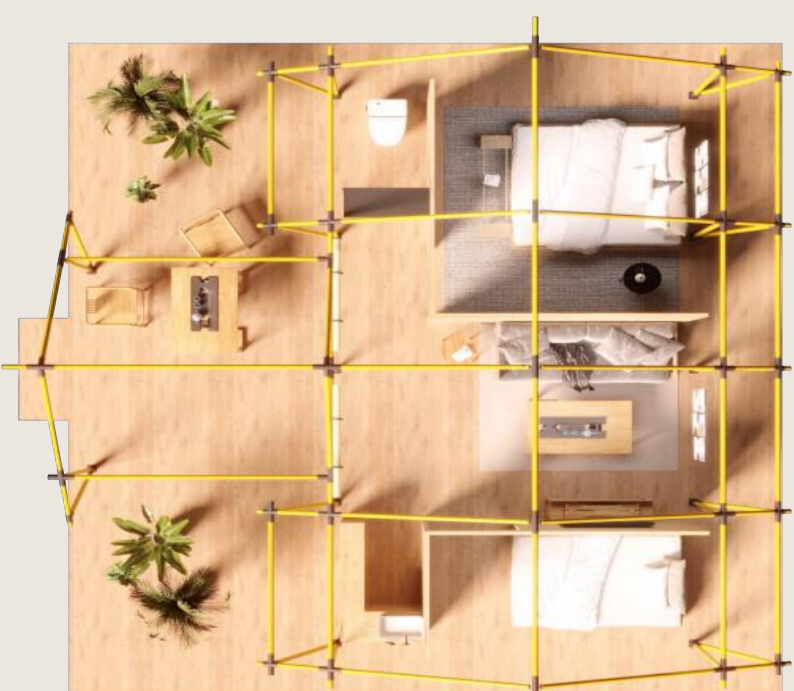


6*9+门厅3*3/60.5m²

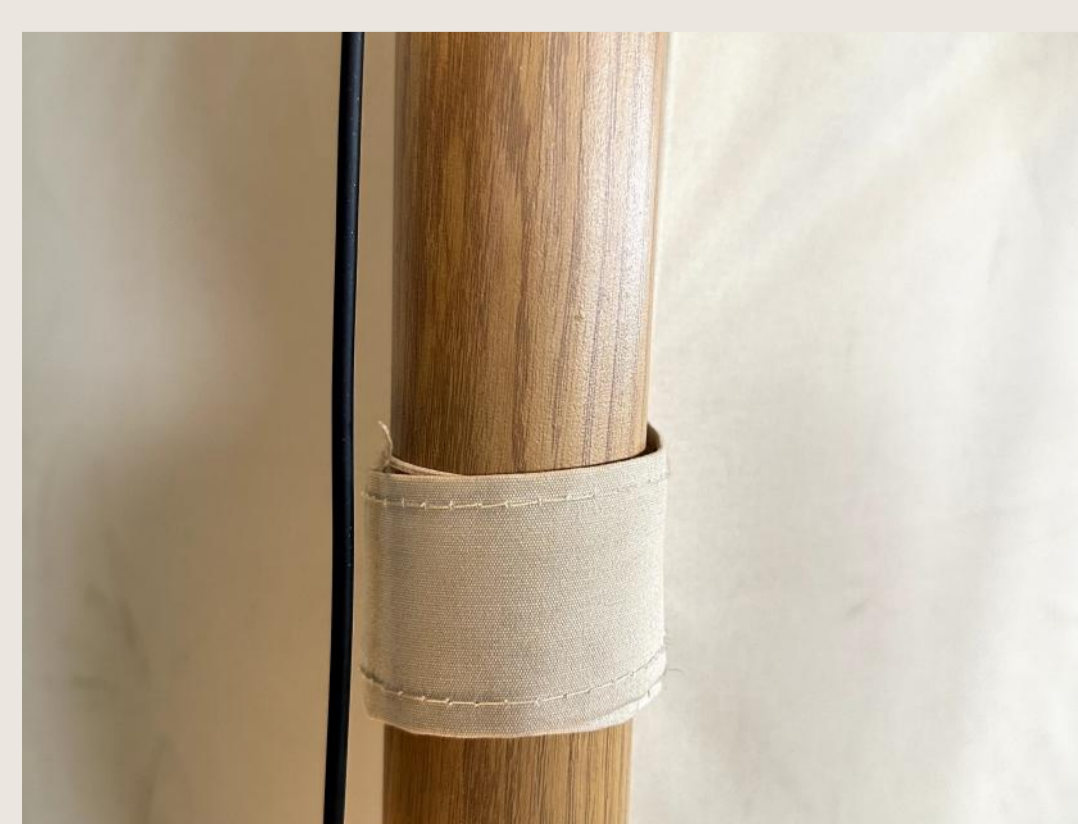

Fixed Strap



Linking Pipe

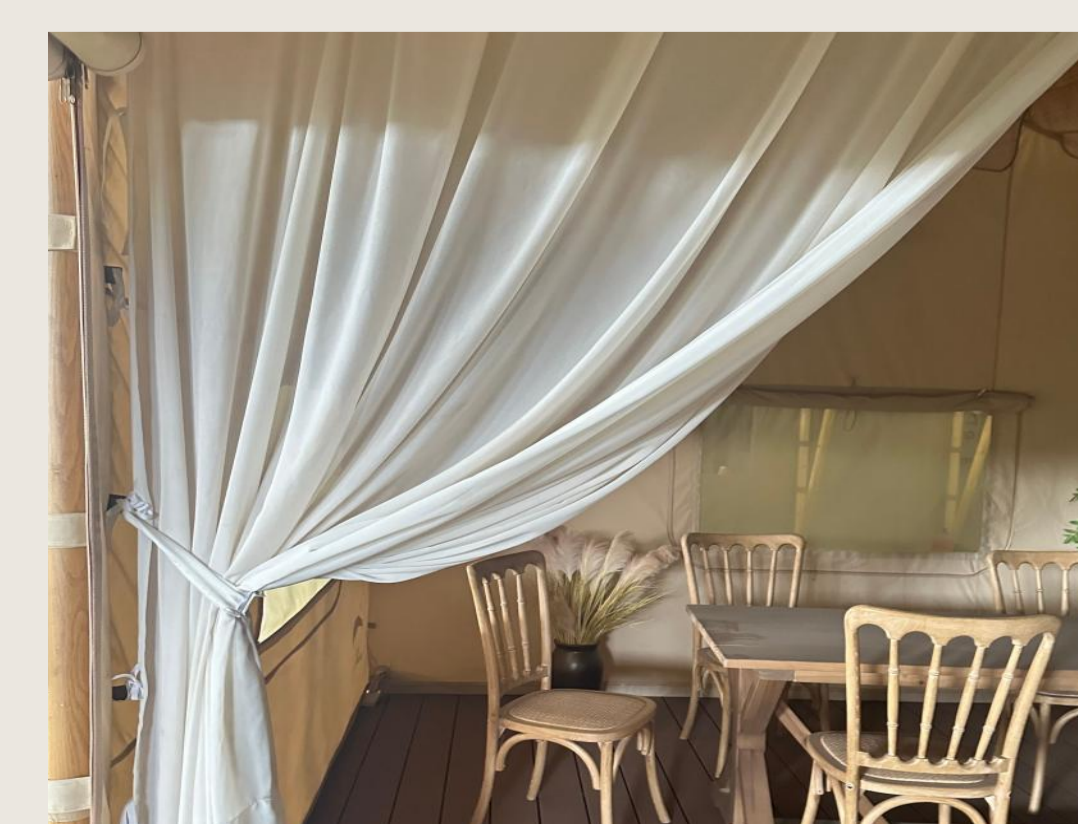

Inner Tent



Mosquito-Proof Mesh