

Parameters	Configuration		
Overall Dimension(m)/ Area(m ²)	7.0*7.0*2.8*6.1m	7.0*12.0*2.8*6.5m	6.1*12.6*2.6*5.0m
Interior Area(m)/ projected area(m ²)	33.5m ² / 49.0m ²	70m ² / 105m ²	68m ² / 95m ²
Weight/Volume	500kg(No external walls)/2.5m ³	850kg(No external walls)/3.5m ³	980kg(No external walls)/3.8m ³
Colours	Beige, Khaki, Customizable		
Tent Parameters	Exterior fabric: PVDF architectural membrane fabric(750-900g/m ² Double-decker) Inner tent: elastic fabric UV protection(UV800+) Fire-retardant (GB8624) Class B1 Mold-resistant, self-cleaning, PVC lifespan of 15 years+		
Wall Parameters	Three-sided walls + three-sided glass wall/Full-height glass wall (60mm)thermal break aluminum; (5+16+5mm)insulated glass curtain wall Thermal break aluminum framed single/double swing doors with insulated glass (8cm)metal carved panel + bamboo-wood fiber board (100*120cm)thermal break aluminum casement window		
Frame Parameters	Main Pipe: (Φ80mm)Galvanized Steel Pipe、(Φ2mm)Thickness Beam: 80mm*60mm Hot-Dip Galvanized Square Tube, With 2.5mm Thickness Connecting Pipe: U-Shaped Channel Steel, With 5mm Thickness Argon Arc Welded, Hot-Dip Galvanized Corrosion-Resistant Galvanized Steel Plate Outdoor-Specific Baking Paint Treatment (Resistant To Sunlight And Rain)		
Accessory Parameters	Galvanized bolts Hot-dip galvanized corrosion-resistant fittings		




LAYOUT

FLOOR PLAN



7.0*12.0*6.5m / 84m²

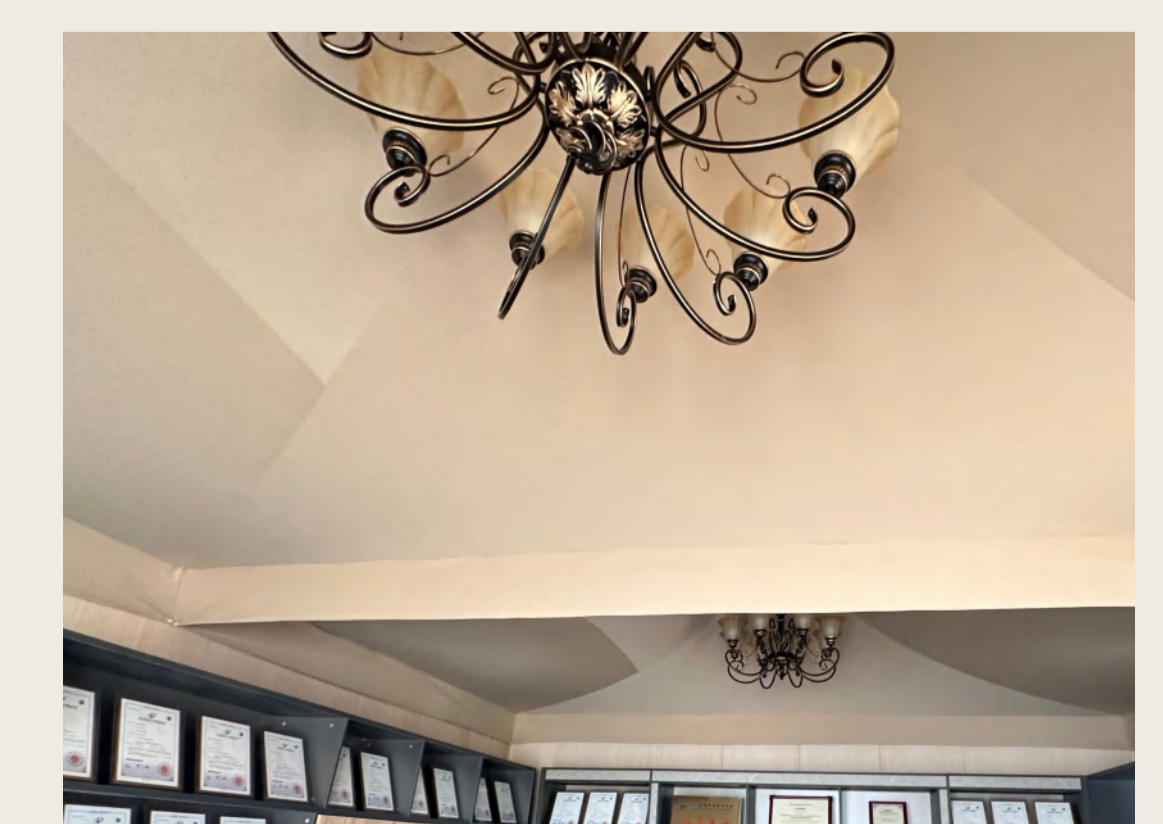

Exterior Wall

Framework Junctions

Bathroom

The Roof