


Parameters	Configuration	Weight	Volume
Overall Dimension(m)/ Area(m <sup>2</sup> )	3.5*3.5*4.80m / 13m <sup>2</sup>	106kg	0.34m <sup>3</sup>
	4.0*4.0*5.45m / 16m <sup>2</sup>	123kg	0.35m <sup>3</sup>
	5.0*5.0*6.80m / 25m <sup>2</sup>	156kg	0.6m <sup>3</sup>
Colours	Beige		
Tent Parameters	TC environmental cotton (285g) waterproof pressure (30KPA) UV protection(UVstandard800+) Fire-retardant (GB8624) Class B1 Mold-resistant, self-cleaning, PVC lifespan of 3 years		
Frame Parameters	Main pipe : Φ75mm Galvanized steel pipe、 1.5mm Thickness Junction Pipe : Φ89mm Galvanized steel pipe、 4.0mm Thickness Argon arc welded, hot-dip galvanized corrosion-resistant galvanized steel plate Outdoor-specific baking paint treatment (resistant to sunlight and rain)		
Accessory Parameters	Stainless steel bolts、 Hot-dip galvanized corrosion-resistant fittings、 Nickel-plated copper snap fasteners、 8mm Self-tightening anti-aging climbing rope		



## DETAIL PART

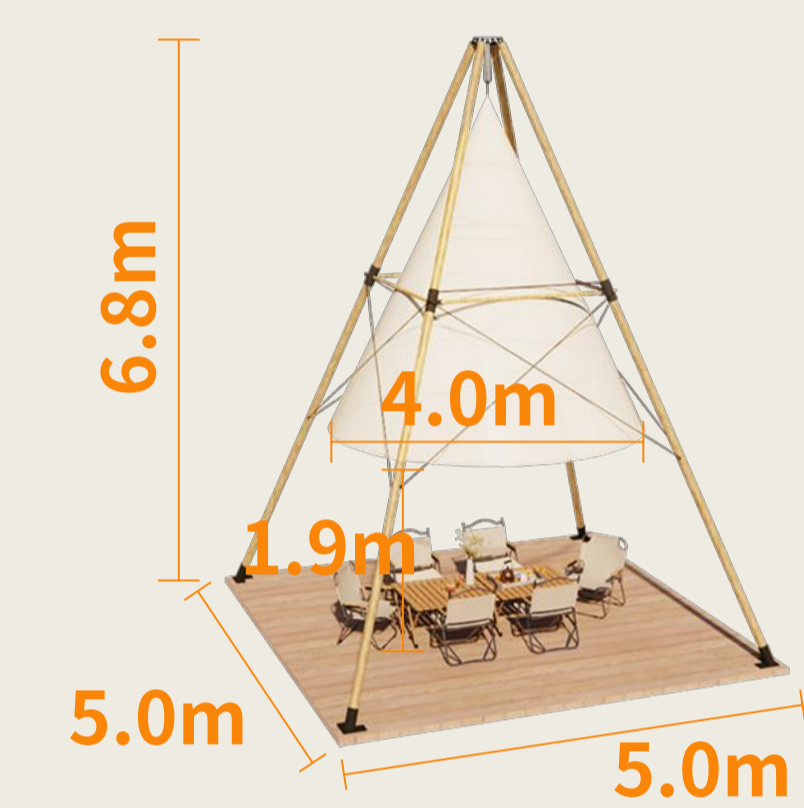

Internal Layout



(Bamboo Joint Color) Painted Hot-Dip Galvanized Steel Pipe




Ground Corner - Ground Peg



Tensioner Pipe



Waterproof Rubber Strip

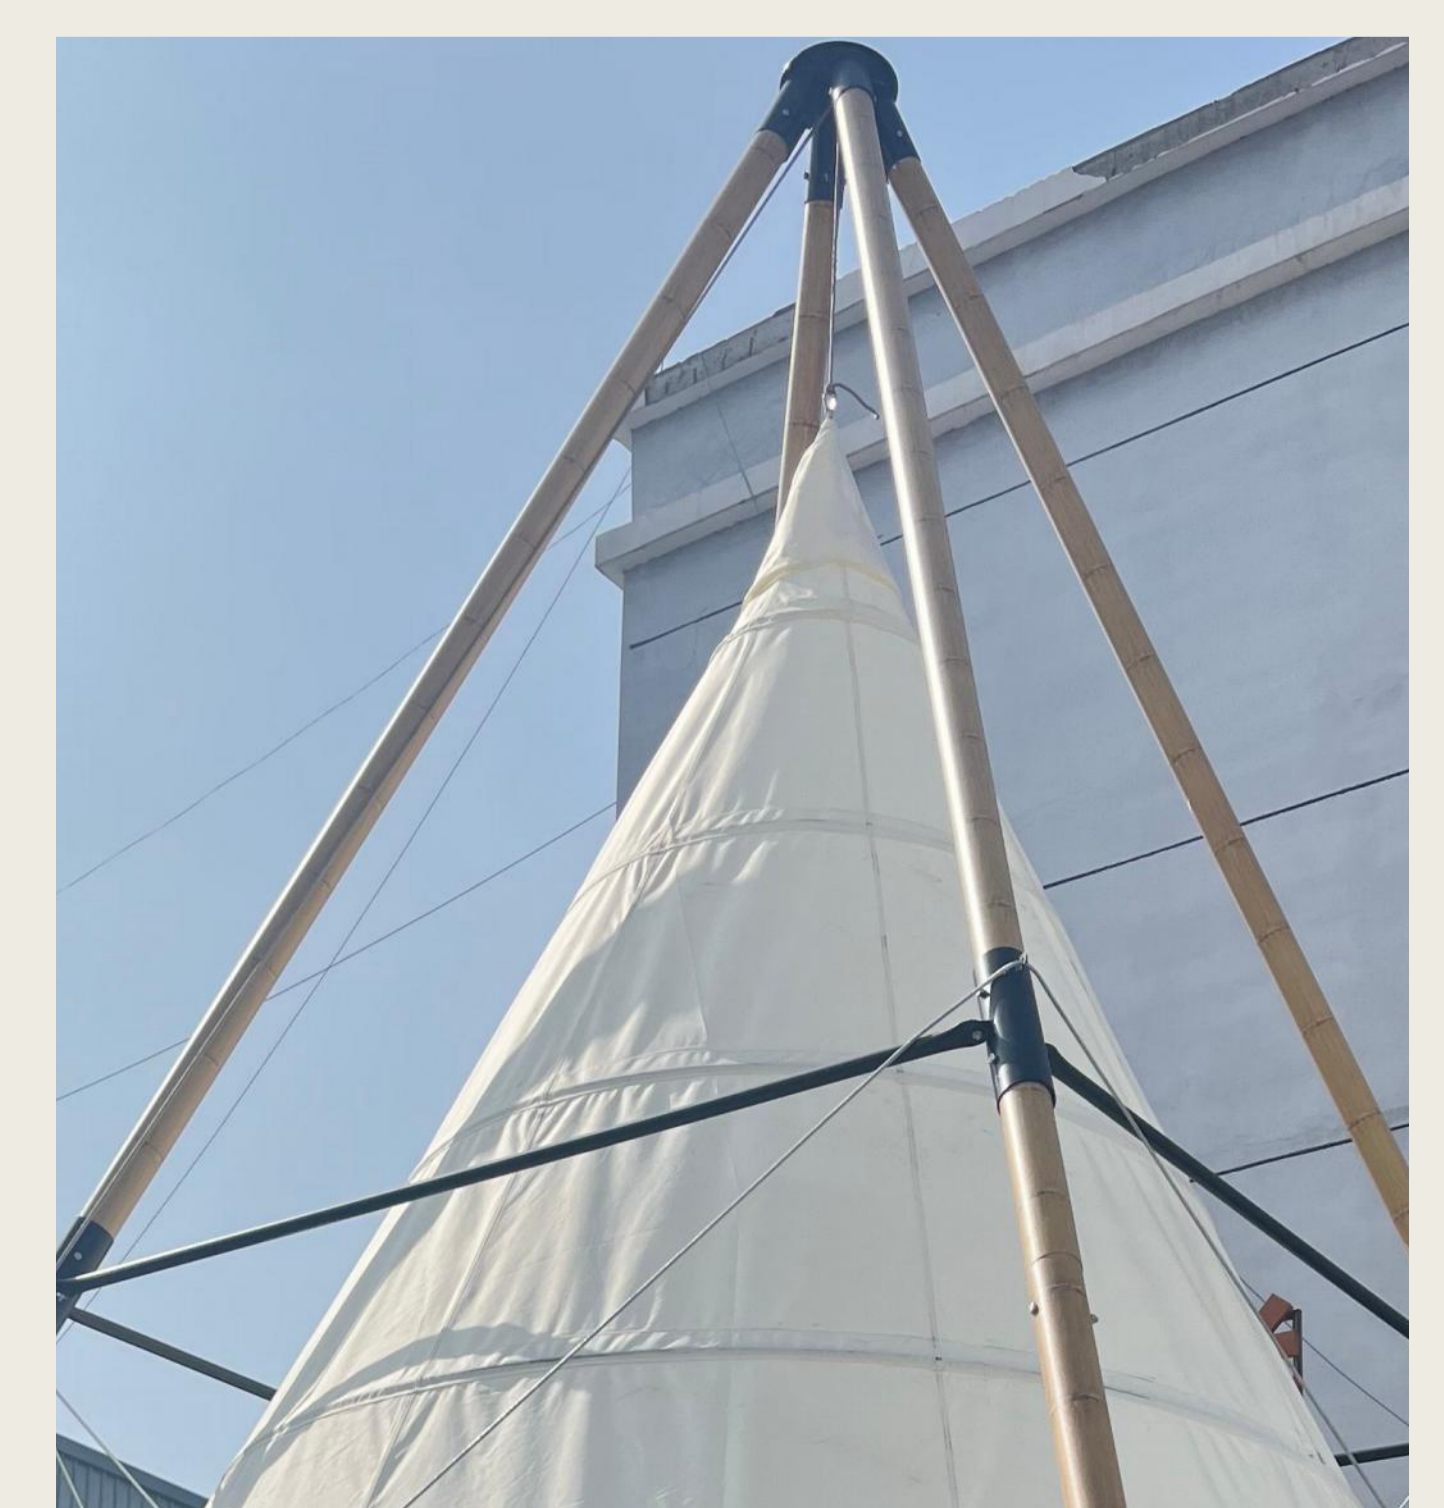

Pyramid Top Connection